

Isuzu D-Max 2012+ MU-X 2013+

Engine Type: 3.0L Turbo Diesel

UNDERBODY PROTECTION:

These protection plates have been designed for installation for the intended application only. They should be mounted according to these installation instructions by an experienced Ironman 4x4 dealer or certified fitter. The plates are fixed to original vehicle mountings located on the vehicle's body load-bearing elements. Upon successful installation the plate should not interfere with any other parts or components.

Ironman 4x4 recommend the use of a floor or transmission jack to assist with the installation of underbody protection plates.

INSTALLATION:


- 1. Remove original protection plates
- 2. Position (Rear Plate) and loosely thread all fasteners into place before tensioning. Refer Illustration.
- 3. Position (Front Plate) and loosely thread all fasteners into place before tensioning, including fasteners joining front and rear plates. Refer Illustration.

WARRANTY: 2 years.

Qty: 2


Thread:	M8x1.25	M10x1.25	M12 x 1.25
Tightening Torque:	24.0Nm	52.0Nm	54.0Nm

M8 Qty: 2



M8 Qty: 4

Part Number: UBP041 *NOTE:* For Holden/Chevrolet Installation Instructions please refer to page 2.

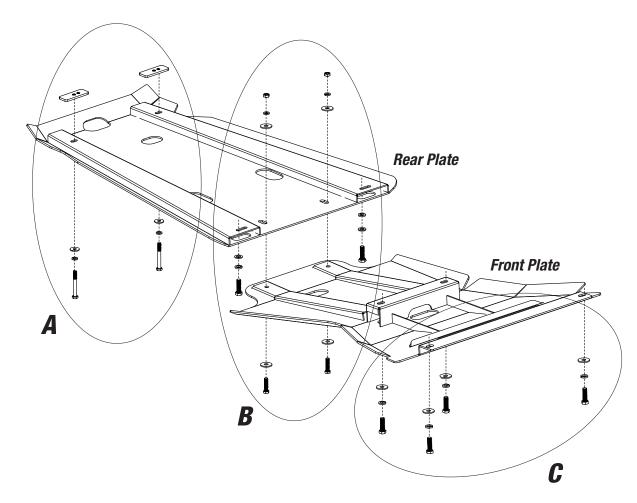


WARRANTY TERMS:

M12 Qty: 2


The plate should only be installed on a vehicle with undamaged body and load-bearing elements, vehicles which have been involved in a significant collision may prevent successful installation.

M12 Qty: 2



Qty: 2

Qty: 2





Holden/Chevrolet Colorado 2012+

Colorado 2012+ Colorado 7 / Trailblazer 2012+

Engine Type: 2.8L Turbo Diesel

Part Number: UBP041 *NOTE:* For Isuzu Installation Instructions please refer to page 1.

UNDERBODY PROTECTION:

These protection plates have been designed for installation for the intended application only. They should be mounted according to these installation instructions by an experienced Ironman 4x4 dealer or certified fitter. The plates are fixed to original vehicle mountings located on the vehicle's body load-bearing elements. Upon successful installation the plate should not interfere with any other parts or components.

Ironman 4x4 recommend the use of a floor or transmission jack to assist with the installation of underbody protection plates.


INSTALLATION:


- 1. Remove original protection plates
- 2. Position (Rear Plate) and loosely thread all fasteners into place before tensioning. Refer Illustration.
- 3. Position (Front Plate) and loosely thread all fasteners into place before tensioning, including fasteners joining front and rear plates. Refer Illustration.

WARRANTY: 2 years.

Qty: 2


Thread:	M8x1.25	M10x1.25
Tightening Torque:	24.0Nm	52.0Nm



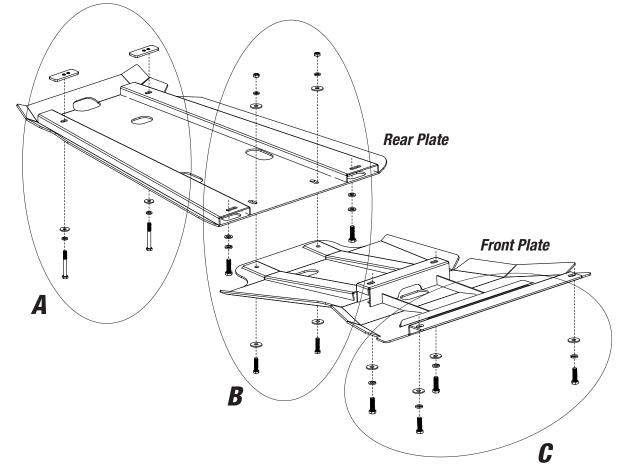

WARRANTY TERMS:

The plate should only be installed on a vehicle with undamaged body and load-bearing elements, vehicles which have been involved in a significant collision may prevent successful installation.



M8 Qty: 4

Qty: 2

M8 Qty: 2



